

P8M-street



应用 APPLICATION

抽吸和输送耐磨性物料，扫路车等专用车领域。
In the field of specialized vehicles such as suction and transportation of wear-resistant materials and road sweepers.


结构 STRUCTURE

聚醚型聚氨酯，透明，黑色钢丝包覆。耐水解和微生物，无毒，光滑内壁，改进流动去向，外折通道柔韧性好，优异的耐磨性，耐油性。

Polyether polyurethane, transparent, covered with black steel wire. Resistant to hydrolysis and microorganisms, non-toxic, smooth inner wall, improved flow direction, good flexibility in external folding channels, excellent wear resistance, and oil resistance.

温度 TEMPERATURE

-40°C至+90°C。
-40 °C to +90 °C.

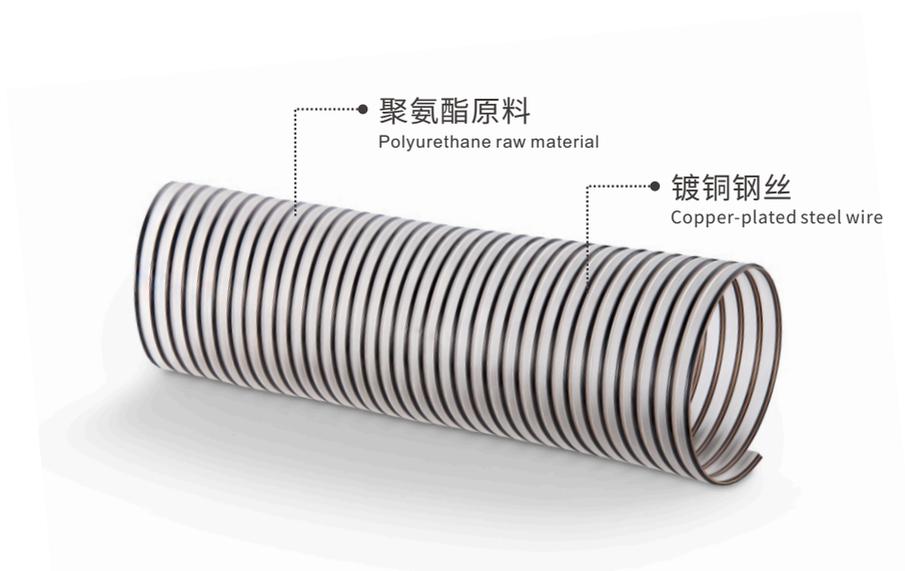

内径 (mm)	外径 (mm)	弯曲半径 (mm)	压力 (bar)	真空度 (bar)	重量 (kg/m)	长度 (m)
Inside diameter	Outside diameter	Bending radius	Pressure	Vacuum	Weight	Standard length
203	216	330	0.367	0.125	3.160	10
254	267	407	0.285	0.080	3.390	10
305	318	482	0.245	0.060	4.850	10