

# SP-PU



## 应用 APPLICATION

用于抽吸、输送软管、建筑清洁、颗粒输送、工业真空、工业除尘器、聚氨酯(PU)软管、机械工程。

Used for suction, conveying hoses, building cleaning, particle conveying, industrial vacuum, industrial dust collectors, polyurethane (PU) hoses, mechanical engineering.

## 温度 TEMPERATURE

约-40°C至+90°C。

Approximately -40 °C to +90 °C.

## 特性 CHARACTERISTIC


柔软PU管壁，内嵌螺旋钢丝加强，纤维增强。耐油、耐化学性、耐高温、超级柔软，具有非常高的抗拉强度；柔软，内壁平滑，易于操作。

Soft PU tube wall, embedded with spiral steel wire reinforcement, fiber reinforcement. Oil resistant, chemical resistant, temperature resistant, super soft, with very high tensile strength; Soft, smooth inner wall, easy to operate.

## 结构 STRUCTURE

具有良好的耐磨性，管壁厚度约为0.65mm。

It has good wear resistance and a pipe wall thickness of approximately 0.65mm.

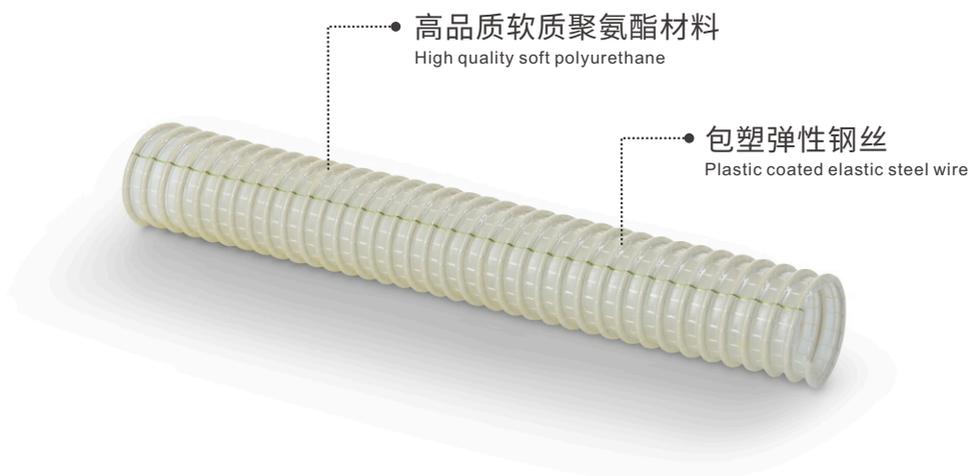

内径 (mm)	外径 (mm)	弯曲半径 (mm)	压力 (bar)	真空度 (bar)	重量 (kg/m)	长度 (m)
Inside diameter	Outside diameter	Bending radius	Pressure	Vacuum	Weight	Standard length
25	31	25	1.70	0.20	0.20	15
28	34	28	1.60	0.20	0.23	15
32	38	32	1.50	0.20	0.28	15
35	41	35	1.40	0.20	0.31	15
38	44	38	1.40	0.20	0.34	15
41	47	41	1.40	0.18	0.37	15
44	50	44	1.30	0.16	0.38	15
51	57	51	1.30	0.15	0.46	15
60	66	60	1.20	0.14	0.51	15
63	69	63	1.00	0.14	0.53	15
70	76	70	0.90	0.12	0.58	15
76	82	76	0.80	0.10	0.68	15
80	86	80	0.70	0.09	0.83	15
89	95	89	0.70	0.09	0.93	15
102	108	102	0.60	0.08	1.00	15