

VP103S



应用 APPLICATION

用于磨损性粉体、散装物料、颗粒和气体的软管输送。
印刷电路板钻孔机、胶印机、地板清洗机。

Used for hose transportation of abrasive powders, bulk materials, particles, and gases. Printed circuit board drilling machine, offset printing machine, floor cleaning machine.

温度 TEMPERATURE

约-40°C至+90°C；短时间可达到约+125°C。

Approximately -40 to +90 ; It can reach about +125 in a short period of time.

结构 STRUCTURE


优质的聚氨酯原料,内嵌镀铜钢丝加工而成。接地排静电,中等重型、高抗磨损、耐微生物、拉伸比1:4。

Made of high-quality polyurethane raw materials embedded with copper plated steel wire. Grounding electrostatic discharge, medium to heavy duty, high wear resistance, microbial resistance, and a stretching ratio of 1:4.

可选类型 OPTIONAL TYPE

VP103S-ET · 食品级、耐水解、耐微生物。

VP103S-ET · Food grade, hydrolysis resistant, and resistant to microorganisms.

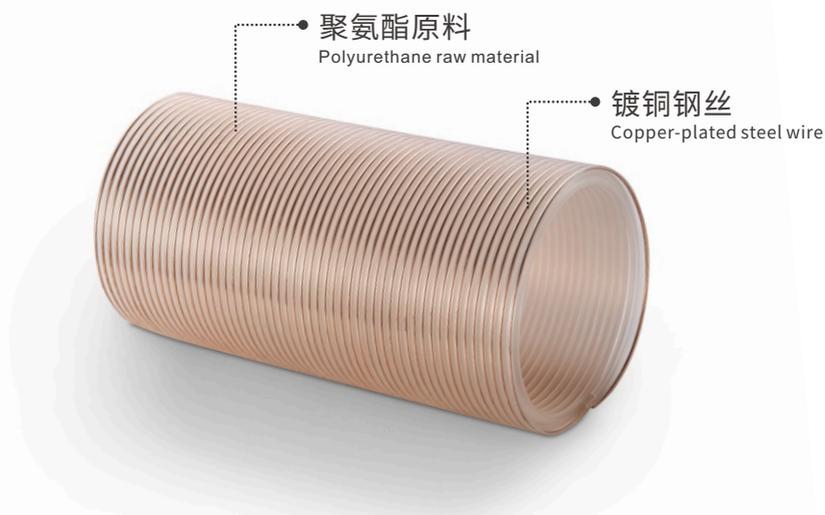

内径 (mm) Inside diameter	外径 (mm) Outside diameter	弯曲半径 (mm) Bending radius	压力 (bar) Pressure	真空度 (bar) Vacuum	重量 (kg/m) Weight	厚度 (mm) thickness
100-102	108	58.0	0.410	0.090	0.86	0.6
125-127	133	70.5	0.330	0.060	1.02	0.6
150-152	158	83.0	0.275	0.055	1.18	0.6
178-180	188	98.0	0.230	0.040	1.37	0.6
200-203	208	108.0	0.205	0.040	1.74	0.6