

# HTS-MED



## 应用 APPLICATION

用于医疗设备，线缆保护，输送和抽吸空气，烟，软管轻便柔软，颜色为乳白色，软管为特殊材质，满足UV标准

Used for medical equipment, cable protection, transportation and suction of air, smoke, lightweight and soft hoses, with a milky white color. The hoses are made of special materials and meet UV standards


## 结构 STRUCTURE

PVC软管，硬质PVC筋骨螺旋。  
PVC hose, rigid PVC tendon and bone spiral.

## 温度 TEMPERATURE

-10°C至+60°C;

-10°C to +60°C.

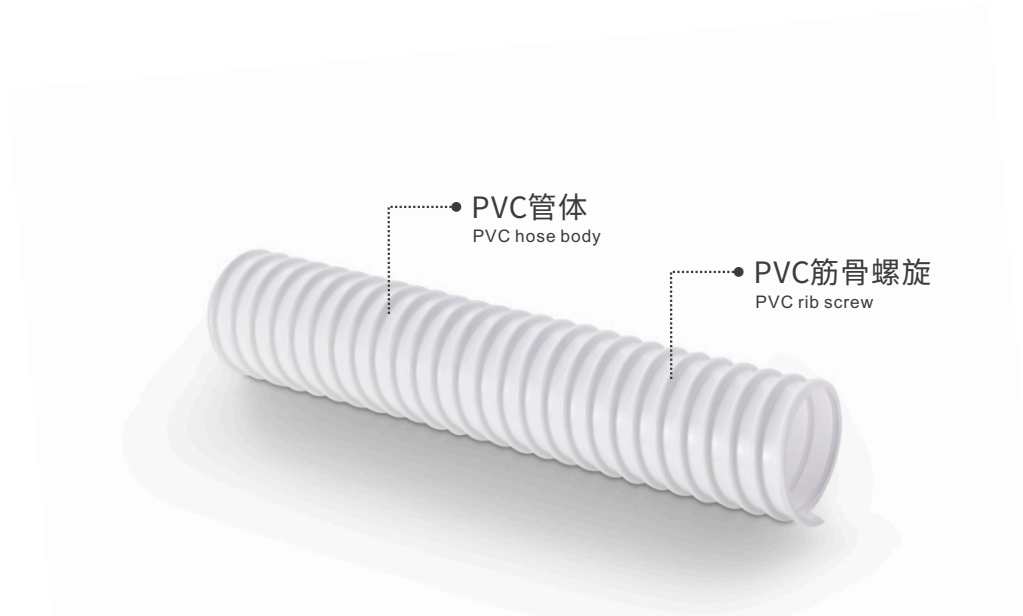

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	真空度 (m H <sub>2</sub> O)	厚度 (mm)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	Vacuum	thickness	Weight	Coil length
20	26.0	20.0	-	5	0.9	0.170	50
25	30.6	25.0	-	5	0.7	0.185	50
30	35.6	30.0	-	5	0.7	0.225	50
32	38.2	32.0	-	5	0.8	0.255	50
35	41.4	35.0	-	5	0.8	0.300	50
38	44.4	38.0	-	5	0.8	0.310	50
40	46.6	40.0	-	4	0.9	0.330	50
45	51.6	45.0	-	4	0.9	0.370	50
50	57.4	50.0	-	4	1.0	0.440	50
60	68.0	60.0	-	4	1.0	0.560	50
63	71.0	63.5	-	4	1.0	0.600	50
70	78.2	70.0	-	4	1.0	0.640	50
75	84.4	75.0	-	4	1.1	0.730	50
80	89.4	80.0	-	4	1.1	0.790	30
90	100.2	90.0	-	4	1.1	0.950	30
100	109.4	100.0	-	4	1.0	0.980	30
110	120.0	110.0	-	4	1.2	1.120	30
120	131.0	120.0	-	4	1.3	1.300	30
125	136.5	125.0	-	4	1.2	1.360	30
130	141.4	130.0	-	4	1.2	1.440	30
140	152.5	140.0	-	4	1.2	1.600	30
150	163.0	150.0	-	4	1.3	1.760	30
160	173.0	160.0	-	4	1.3	1.930	20
180	194.0	180.0	-	4	1.3	2.300	20
200	213.2	200.0	-	4	1.3	2.650	20
250	265.4	250.0	-	4	1.3	3.600	15
300	320.0	300.0	-	4	1.5	4.500	10