

# KX160



## 应用 APPLICATION

家居、体育馆、剧院、工厂、医院、卫生间排气、厨房通风、各种管道换气排风、工作室、地铁、通风空调系统、支风管、新风管、风口连接。

Home furnishings, sports venues, theaters, factories, hospitals, bathroom exhaust, kitchen ventilation, various pipeline ventilation and exhaust, studios, subways, ventilation and air conditioning systems, branch ducts, fresh air ducts, and air outlet connections.

## 温度 TEMPERATURE

约-30°C /+120°C (+150°C 短时间)

Approximately -30°C/+120°C (+150°C for a short period of time)

## 特性 CHARACTERISTIC


具有柔软性好，抽风声音比普通塑料烟管要小的多，阻燃性好，不沾油，使用寿命长，外形高档与不锈钢抽油烟机搭配更加合理美观。高柔软性，高负压，高撕扯性。

It has good softness, much lower exhaust sound than ordinary plastic smoke pipes, good flame retardancy, non oil contact, long service life, high-end appearance, and a more reasonable and beautiful combination with stainless steel range hoods. High flexibility, high negative pressure, and high tear resistance.

## 结构 STRUCTURE

软管由三层铝箔制成，内嵌钢丝增强。

The hose is made of three layers of aluminum foil and reinforced with embedded steel wires.

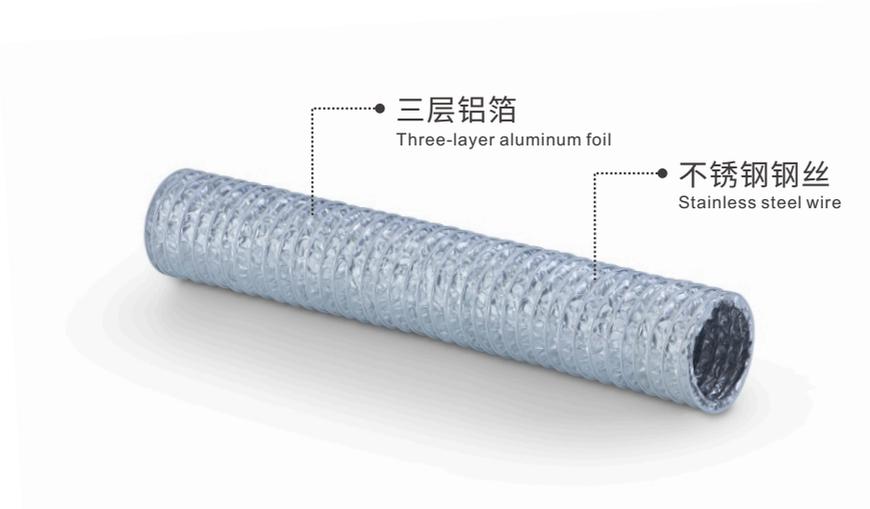

内径 (mm)	外径 (mm)	弯曲半径 (mm)	压力 (bar)	真空度 (bar)	重量 (kg/m)	长度 (m)
Inside diameter	Outside diameter	Bending radius	Pressure	Vacuum	Weight	Standard length
40	43	23.0	0.250	0.150	0.100	10
50-51	54	28.5	0.240	0.145	0.120	10
60	63	33.0	0.195	0.115	0.140	10
75-76	79	41.0	0.160	0.080	0.180	10
80	83	43.0	0.150	0.070	0.190	10
89-90	93	48.0	0.140	0.060	0.200	10
100-102	105	54.0	0.120	0.050	0.240	10
110	113	58.0	0.110	0.045	0.270	10
125-127	130	66.5	0.100	0.035	0.320	10
140	143	73.0	0.090	0.035	0.350	10
150-152	155	79.0	0.080	0.035	0.370	10
160	163	83.0	0.075	0.025	0.440	10
178-180	183	93.0	0.070	0.020	0.540	10
200-203	206	104.5	0.060	0.020	0.600	10
254	258	131.0	0.050	0.010	0.790	10
305	309	156.5	0.040	0.005	0.950	10
356	360	182.0	0.035	0.005	1.110	10
405-406	410	207.0	0.030	0.005	1.280	10
508	514	260.0	0.020	0.002	1.560	10