

VCP302



应用 APPLICATION


用于抽吸和输送液体。
Used for suction and conveying liquids.

结构 STRUCTURE

中型PVC软管，硬质PVC筋骨螺旋，表面平滑。
Medium sized PVC hose, with rigid PVC ribs and spirals, with a smooth surface.

温度 TEMPERATURE

-25°C至+70°C;
-25 °C to +70 °C.

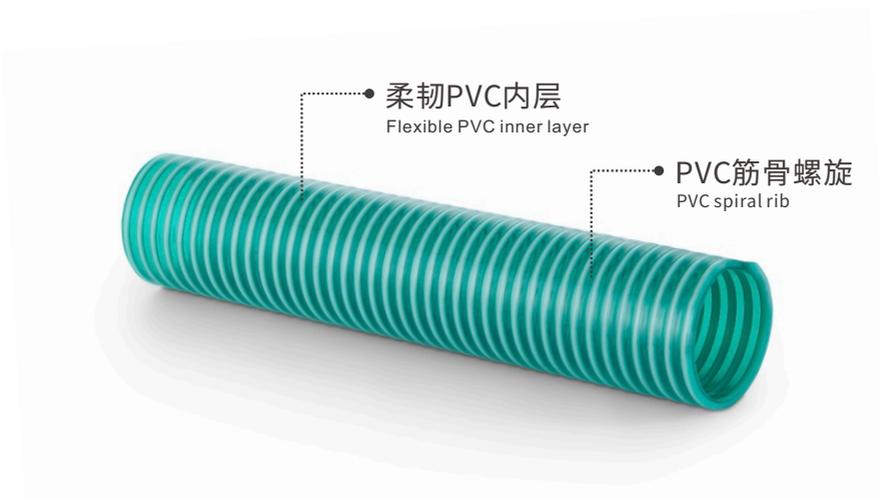

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (mH ₂ O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
20	26.20	65	6.5	21.0	7	0.275	30
25	31.60	100	6.5	21.0	7	0.330	30
30	37.00	125	5.5	18.0	7	0.420	30
32	39.20	135	5.5	18.0	7	0.460	30
35	41.80	145	5.0	16.5	7	0.500	30
38	45.40	155	4.5	15.0	7	0.550	30
40	47.80	160	4.5	15.0	7	0.610	30
45	52.80	180	4.0	13.5	7	0.670	30
50	58.20	200	3.5	12.0	7	0.810	30
60	69.00	245	3.5	12.0	7	0.970	30
63	71.50	260	3.5	12.0	7	1.040	30
75	85.40	315	3.0	9.0	7	1.380	30
76	86.20	320	3.0	9.0	7	1.380	25
89	99.80	355	3.0	9.0	7	1.560	25
102	114.0	430	2.5	9.0	7	2.160	25
127	146.0	670	2.5	7.5	7	3.130	25
152	167.2	750	2.5	7.5	7	4.250	25