

# VCP302 ECO



## 应用 APPLICATION


用于抽吸和输送液体。  
Used for suction and conveying liquids.

## 结构 STRUCTURE

轻质PVC软管，硬质PVC筋骨螺旋。  
Lightweight PVC hose, with rigid PVC ribs and spirals.

## 温度 TEMPERATURE

-25°C至+60°C;  
-25 °C to +60 °C.

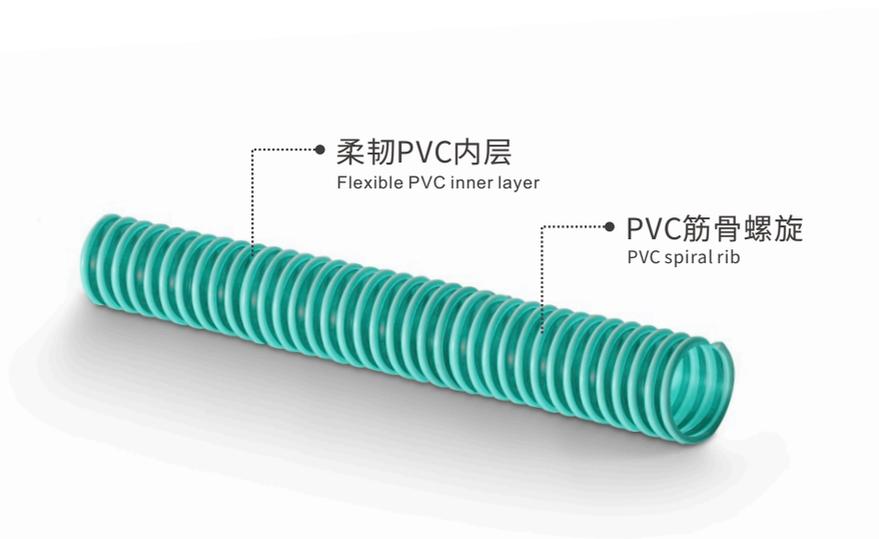

内径 (mm)	弯曲半径 (mm)	工作压力 (bar)	真空度 (mbar)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Bending radius	Working pressure	Vacuum	Weight	Coil length
13	45	8.0	700	0.010	30
16	56	7.0	700	0.011	30
19	66	6.0	700	0.017	30
20	70	6.0	700	0.018	30
25	87	6.0	700	0.019	30
30	105	5.0	700	0.024	30
32	112	5.0	700	0.025	30
35	122	5.0	700	0.030	30
38	133	5.0	700	0.032	30
40	140	4.0	700	0.034	30
45	157	4.0	700	0.040	30
51	178	4.0	700	0.049	30
55	192	3.5	700	0.053	30
60	210	3.5	700	0.058	30
63	220	3.5	700	0.064	30
70	245	3.0	700	0.069	30
76	262	3.0	700	0.081	30
80	280	3.0	700	0.093	30
90	315	3.0	700	0.104	30
102	357	3.0	700	0.128	30
110	440	2.0	700	0.145	30
120	480	2.0	700	0.163	30
127	500	2.0	700	0.186	30
152	608	2.0	700	0.250	30