

# VCP303 FOOD



## 应用 APPLICATION


用于抽吸食品液体。  
Used for suction and conveying liquids.

## 结构 STRUCTURE

PVC软管，内嵌硬质PVC筋骨螺旋，表面平滑。  
PVC hose, rigid PVC tendon and bone spiral, with a smooth surface.

## 温度 TEMPERATURE

-5°C至+60°C;  
-5°C to +60°C.

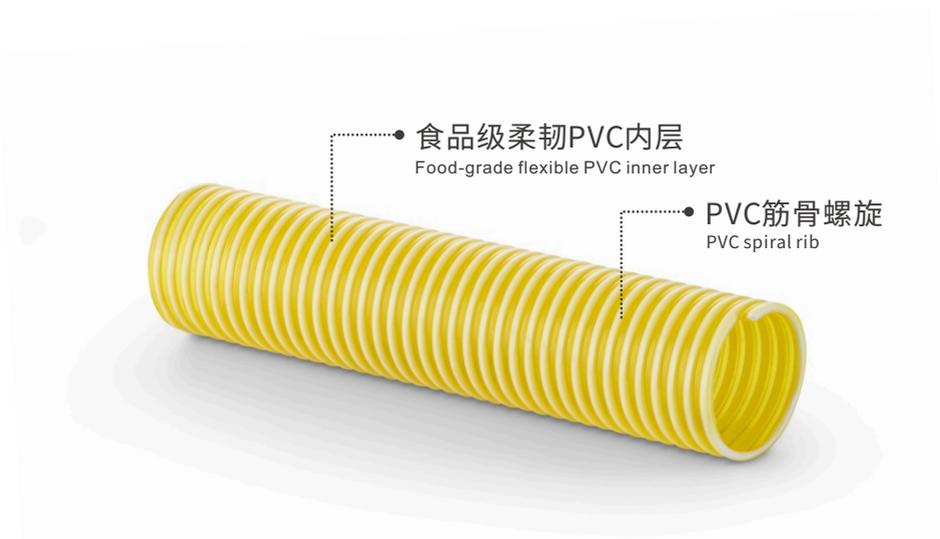

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (m H <sub>2</sub> O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
20	26.20	75	8.0	24.0	7	0.275	30
25	31.60	120	8.0	24.0	7	0.330	30
30	37.00	140	7.0	21.0	7	0.420	30
32	39.20	150	7.0	21.0	7	0.460	30
35	41.80	160	7.0	21.0	7	0.500	30
38	45.40	170	6.5	19.5	7	0.550	30
40	47.60	180	6.5	19.5	7	0.610	30
45	52.80	200	6.5	19.5	7	0.670	30
50	58.20	220	6.0	18.0	7	0.810	30
60	69.00	270	5.0	15.0	7	0.970	30
63	71.50	290	5.0	15.0	7	1.040	30
70	79.20	320	4.0	12.0	7	1.200	30
75	85.40	350	4.0	12.0	7	1.380	30
80	90.60	360	4.0	12.0	7	1.560	25
90	100.4	430	4.0	12.0	7	1.800	25
100	112.0	480	4.0	12.0	7	2.160	25
102	114.0	480	4.0	12.0	7	2.160	25
110	122.0	530	4.0	12.0	6	2.400	25
120	132.4	680	3.0	9.0	6	2.850	25
125	137.6	730	3.0	9.0	6	3.130	25
150	164.4	810	3.0	9.0	5	4.250	25
200	218.2	900	2.0	6.0	5	6.400	10