

# VCP303 RWPHF



## 应用 APPLICATION

用于酒类行业重负荷输送，抽吸和输送食品液体和低于28%的酒精液体。

Used for heavy-duty transportation, suction, and transportation of food liquids and alcohol liquids below 28% in the alcohol industry.


## 结构 STRUCTURE

PVC-PHF软管，硬质PVC筋骨螺旋。  
PVC-PHF hose, rigid PVC tendon and bone spiral.

## 温度 TEMPERATURE

-5°C至+60°C;

-5°C to +60°C.

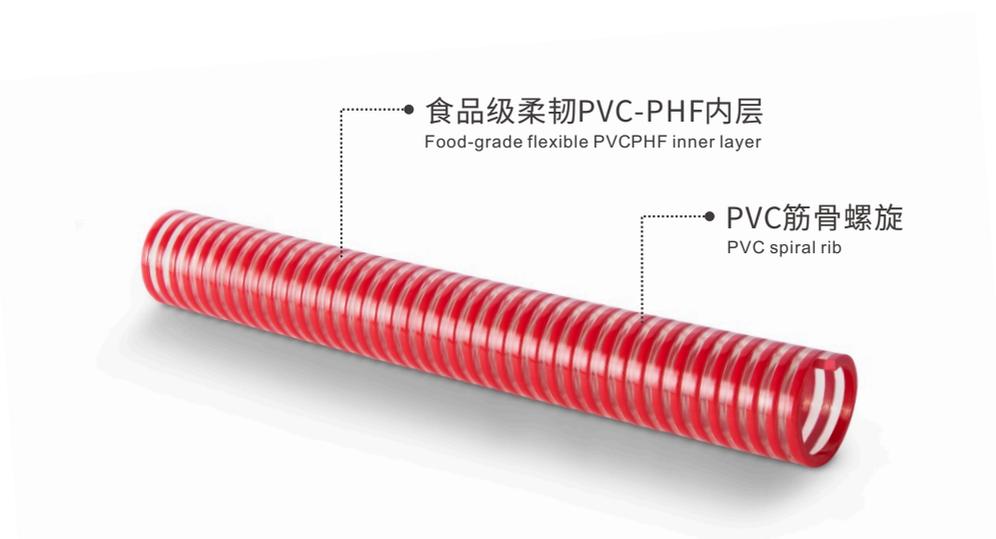

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (m H <sub>2</sub> O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
25	32.6	175	8	24	9	0.40	30
30	37.6	210	8	24	9	0.50	30
32	40.0	220	8	24	9	0.52	30
35	43.0	240	8	24	9	0.60	30
38	46.4	250	8	24	9	0.70	30
40	49.0	260	8	24	9	0.75	30
45	54.0	290	8	24	9	0.90	30
50	59.0	325	8	24	9	1.00	30
60	71.0	380	7	21	9	1.45	30
63	75.0	400	7	21	9	1.67	30
70	82.0	450	6	18	9	1.80	30
75	87.0	490	6	18	9	1.90	30
80	93.0	530	5	15	9	2.20	30
90	104.0	600	5	15	9	2.48	30
100	116.0	700	4	12	9	3.30	30
102	118.0	700	4	12	9	3.30	30
110	126.0	800	4	12	9	3.45	30
120	136.0	900	4	12	9	3.60	30
125	142.0	980	4	12	9	4.20	30
150	170.0	1350	3	9	9	6.30	30