

VCP 202OIL



+15%

应用 APPLICATION


用于吸入和输送工业油。
Used for inhaling and transporting industrial oil.

结构 STRUCTURE

PVC软管，具有硬质PVC螺旋和光滑的内部。
PVC hose with hard PVC spiral and smooth interior.

温度 TEMPERATURE

-20°C至+60°C；
-20°C to +60°C.

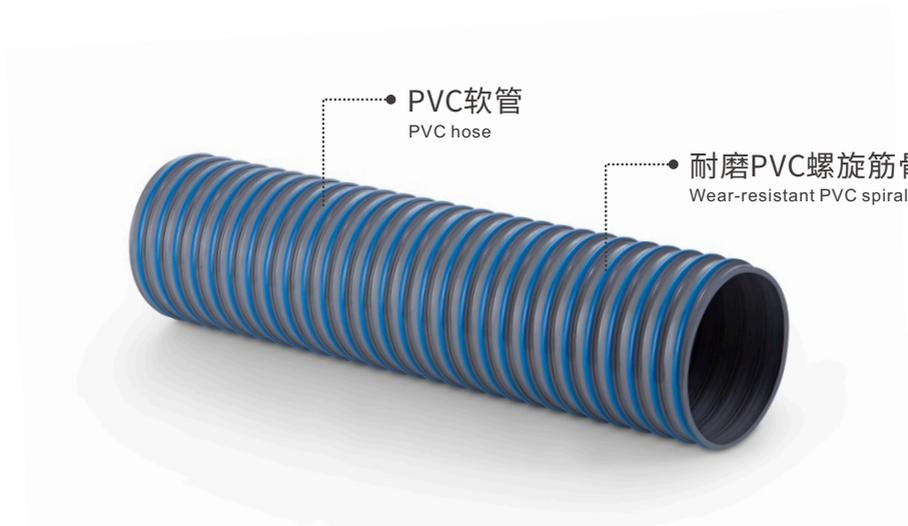

| 内径 (mm) | 外径 (mm) | 弯曲半径 (mm) | 工作压力 (bar) | 爆破压力 (bar) | 真空度 (mH ₂ O) | 重量 (kg/m) | 每卷长度 (mt) |
|-----------------|------------------|----------------|------------------|----------------|-------------------------|-----------|-------------|
| Inside diameter | Outside diameter | Bending radius | Working pressure | burst pressure | Vacuum | Weight | Coil length |
| 25.0 | 34.0 | 90 | 6.0 | 18.0 | 9 | 0.48 | 30 |
| 32.0 | 41.4 | 115 | 5.0 | 15.0 | 9 | 0.58 | 30 |
| 38.0 | 47.6 | 135 | 5.0 | 15.0 | 9 | 0.68 | 30 |
| 50.8 | 61.2 | 175 | 4.5 | 13.5 | 9 | 1.05 | 30 |
| 63.5 | 75.5 | 220 | 4.0 | 12.0 | 9 | 1.39 | 30 |
| 76.2 | 89.0 | 270 | 3.5 | 10.5 | 9 | 1.70 | 30 |
| 101.6 | 116.4 | 360 | 2.5 | 7.5 | 9 | 2.70 | 30 |
| 152.4 | 170.4 | 530 | 1.5 | 4.5 | 9 | 5.00 | 30 |