

VCP 302COLD



应用 APPLICATION


适合在寒冷气候中抽吸和输送液体。
Suitable for suction and transportation of liquids in cold climates.

结构 STRUCTURE

柔软PVC管，硬质PVC筋骨螺旋。
Soft PVC pipe, hard PVC tendon and bone spiral.

温度 TEMPERATURE

-40°C至+60°C;
-40 °C to +60 °C.

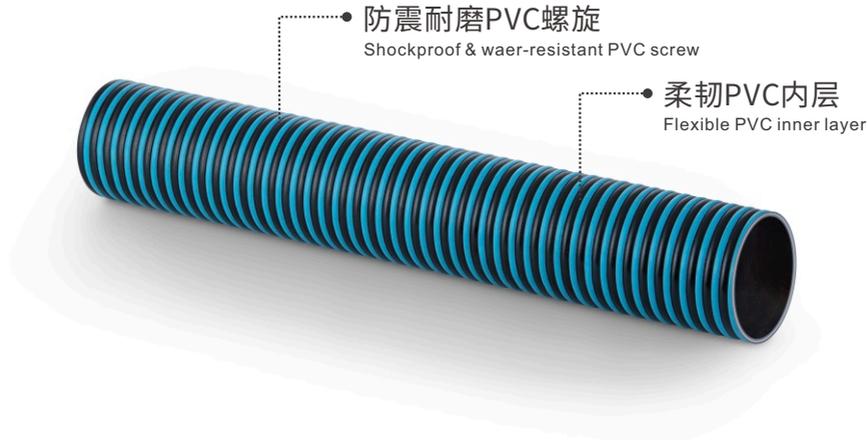

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (m H ₂ O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
51	61.8	165	3.0	9.0	9	1.10	30
63	75.5	205	3.0	9.0	9	1.45	30
76	89.2	260	3.0	9.0	9	1.80	30
80	94.0	280	3.0	9.0	9	1.90	30
90	102.9	300	2.5	7.5	9	2.25	30
102	117.0	330	2.0	6.0	9	2.80	30
110	126.4	360	1.5	4.5	9	3.40	20
127	144.0	420	1.0	3.0	9	4.00	20
152	170.4	510	1.0	3.0	9	5.00	20