

VCP203 SHARK



应用 APPLICATION

用于抽吸和输送渔业，以及渔业产品。
Used for pumping and transporting fisheries, as well as fishery products.

结构 STRUCTURE


抗震型PVC软管，硬质PVC筋骨螺旋，内壁光滑，耐真空强。

Anti seismic PVC hose, hard PVC ribbed spiral, smooth inner wall, and strong vacuum resistance.

温度 TEMPERATURE

-25°C至+60°C;

-25°C to +60°C.

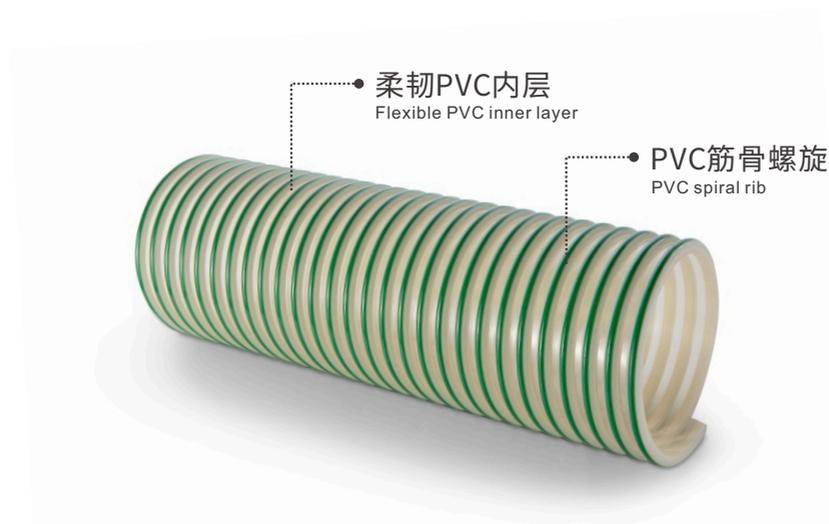

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (mH ₂ O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
102	121.6	200	2.50	7.50	9.5	2.90	-
127	149.0	300	2.50	7.50	9.5	3.60	-
152	175.4	350	2.00	6.00	9.5	5.60	-
203	230.2	600	2.00	6.00	9.5	9.20	-
254	290.0	1000	1.50	4.50	9.5	14.5	-
305	344.8	1500	1.50	4.50	9.5	19.0	-
355	396.0	2200	1.25	3.75	9.0	22.0	-
407	449.4	3000	1.00	3.00	9.0	28.0	-