

VCP 304 MID



应用 APPLICATION


耐寒性材质, PVC软管, 硬质PVC筋骨螺旋。
Cold resistant material, PVC hose, rigid PVC reinforcement spiral.

结构 STRUCTURE

PVC软管, 硬质PVC筋骨螺旋。
PVC hose, rigid PVC tendon and bone spiral.

温度 TEMPERATURE

-40°C至+60°C;
-40 °C to +60 °C.

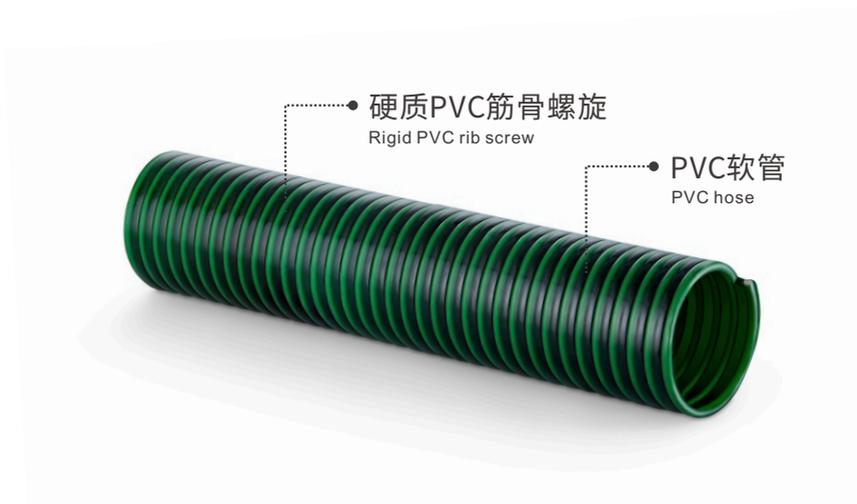

内径 (mm)	外径 (mm)	弯曲半径 (mm)	工作压力 (bar)	爆破压力 (bar)	真空度 (m H ₂ O)	重量 (kg/m)	每卷长度 (mt)
Inside diameter	Outside diameter	Bending radius	Working pressure	burst pressure	Vacuum	Weight	Coil length
25	33.8	85	4.0	12.0	8	0.50	30
32	40.8	110	4.0	12.0	8	0.60	30
38	47.0	135	4.0	12.0	8	0.70	30
40	49.0	140	3.5	10.5	8	0.74	30
45	55.0	155	3.5	10.5	8	0.90	30
50	61.0	175	3.5	10.5	8	1.05	30
51	61.8	175	3.0	9.0	8	1.05	30
60	71.2	210	3.0	9.0	8	1.25	30
63	75.5	220	3.0	9.0	8	1.39	30
70	82.0	245	3.0	9.0	8	1.65	30
75	88.0	260	3.0	9.0	8	1.70	30
76	89.2	260	3.0	9.0	8	1.70	30
80	93.0	280	2.0	6.0	8	1.85	30
89	102.3	310	2.0	6.0	8	2.25	30
90	103.7	315	2.0	6.0	8	2.25	30
100	114.8	350	2.0	6.0	8	2.70	30
102	116.2	350	2.0	6.0	8	2.70	30
110	125.5	385	2.0	6.0	8	3.10	20
120	136.0	420	2.0	6.0	8	3.60	20
125	142.1	440	2.0	6.0	8	3.90	20
127	143.6	445	1.5	4.5	8	3.90	20
130	147.0	455	1.5	4.5	8	4.10	20
133	150.0	465	1.5	4.5	8	4.20	20
140	157.4	490	1.5	4.5	8	4.55	20
150	168.0	525	1.5	4.5	7	5.00	20
152	170.4	525	1.0	3.0	7	5.00	20
160	178.8	560	1.0	3.0	7	5.60	20
200	226.0	700	1.0	3.0	7	9.50	-
203	229.2	700	1.0	3.0	7	9.50	-
250	280.0	875	1.0	3.0	7	14.00	-
254	284.0	1000	1.0	3.0	7	13.50	-